Spool File Properties - Function 30 function sized\_window\_gloss(win\_url)

# **Spool File Properties - Function 30**

When you invoke this function, the **Spool File Properties** window appears.

```
*** Natural Spool Administration ***
Time 09:46:48
                                                       Date 2002-10-18
                                                        File 7/411
User SAG
                               Menu
                                 +----Spool File Properties 7/411-----+
      Administration
                                          Format
      10 Reports/Queues
                                          Reset
                                    3
      11 Devices
                                          Increase
                                         Recover Password
      12 Abstracts
      13 Applications
                                          Set Spool Options
                              ! 6 Modify Password
      14 Change Spool File
                                ! 7 Access Authorization
                                 ! 8 Display Last Modifications
      Maintenance
      30 Spool File Properties
      31 Objects
      32 Mass Update
                                         Exit
      33 Hardcopy Allocations
34 Transfer Objects
                                 1
                                    Command / _ /
Enter command, or press a PF-key.
 Command ===>
 Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
 Entr Help Menu Exit Forma Reset Incre Recov Set S Modif Acces Displ Canc
```

This section covers the following topics:

- Format Function 30.1
- Reset Function 30.2
- Increase Function 30.3
- Recover Password Function 30.4
- Set Spool Option Function 30.5
- Modify Password Function 30.6
- Access Authorization Function 30.7
- Display Last Modification Function 30.8

## Format - Function 30.1

When you invoke this function, the Format Spool File window appears.

Estimation of Number of Groups <Untitled>

```
*** Natural Spool Administration *** Date 2002-10-18

Menu File 7/411
Time 10:34:10
User SAG
                                +----- Format Spool File 7/411 -----+
    Administration
                              !
!
!
                                     Layout of Report Area
                                                                    1
     10 Reports/Queues
     11 Devices
                          ! Number of groups ..... 500____!
     12 Abstracts
     13 Applications
     14 Change Spool File ! Number of records/group .. 3_____
     Maintenance
                                      Password
     30 Spool File Properties !
                               ! Password .....
     31 Objects
                               !
     32 Mass Update
                              ! New password .....
     33 Hardcopy Allocations
     34 Transfer Objects
Modify values.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Forma Reset Incre Recov Set S Modif Acces Displ Canc
```

In this window, enter the following information:

- The number of groups to be created.
- The number of records for each group.
- An initial password, "SYSPOOL".
- A new password. This new password is required the first time the spool file is formatted; either to change the initial password, or to confirm it. Thereafter, it is only necessary if the password is to be changed.

#### Note:

When formatting the spool file, all existing reports will be deleted. All existing allocations, profile and printer definitions will be kept.

After the spool file has been (re-)formatted, restarting the Natural session is not required .

The following sections provide a general idea as to what values should be taken into account when formatting the spool file. They are not rules which must be followed.

## **Estimation of Number of Groups**

The number of groups and records per group in the spool file affects the number of reports that can be held on the spool file at a time. When allocating space for a report, NATSPOOL acquires a group of records from the spool file even if the output would fit into a single record. Each record of the spool file which is to contain lines of output is 2 KB long.

Therefore, if the average output is small (not greater than 2 KB), it is recommended that only one record per group be defined and as many groups as reports are expected on the spool file at one time.

To calculate the output size, it should be taken into account that each line is compressed by NATSPOOL in such a way that trailing blanks are skipped before the lines are stored on the spool file. Lines which may be considered as blank (that is, which do not contain text) contain a printer control character. The trailing blanks will be skipped, but the printer control character will be stored.

<Untitled> Storage Requirements

If a report has been printed and deleted (DISP=D in the logical printer), its space is re-used by NATSPOOL. This means that it would be sufficient to define only one group with only one record if small reports (not greater than 2 KB) are created one after the other. However, if such a report is created before the previous one is printed (deleted), a NATSPOOL "FILE FULL" condition occurs.

In general, the number of groups required depends on the size of each report, the number of records per group, and the number of reports to be held on the spool file at a time.

The number of records per group is:

The number of groups required by a single report is:

The total number of groups required to ensure space for reports which are to be held at one time is approximately:

## **Storage Requirements**


When NATSPOOL allocates space for a report, it acquires not one record, but a group of records. After the first group is filled, NATSPOOL acquires another group, and so on. The number of groups and records per group in the spool file affects the amount of storage allocated on the spool file.

```
storage = (number of groups) * (number of records per group) * 2 KB
```

### **Example:**

There are two groups, each containing three records.

Formatting in Batch Mode <Untitled>

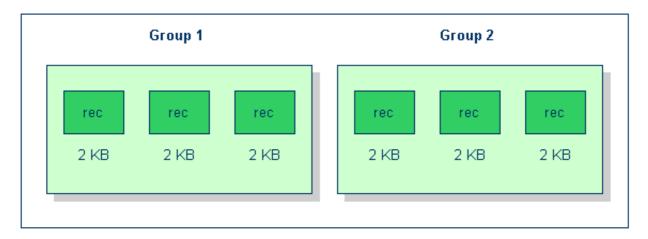

Since each record which is to contain lines of output is 2 KB long, the amount of storage required for output is calculated as follows:

```
storage = (2 groups) * (3 records per group) * 2 KB
```

The required amount of storage in this example is 12 KB.

### **Formatting in Batch Mode**

If the spool file is to be formatted in batch mode, the program SPPBATFO can be used. This program requires the following input:

- the number of groups (N6),
- the number of records per group (N6),
- the password (A8).

### Example - Execution of SPPBATFO under OS/390:

```
//SPPBATFO JOB CLASS=G,MSGCLASS=X
//FORMAT EXEC PGM=NATBATCH,PARM='IM=D,FSPOOL=(XXX,XXX)'
//STEPLIB DD DSN=NATURAL.V41.LOAD,DISP=SHR
// DD DSN=ADABAS.V61.LOAD,DISP=SHR
//DDCARD DD NATURAL.V41.SOURCE(ADAPARM),DISP=SHR
//CMPRINT DD SYSOUT=X
//CMSYNIN DD *
LOGON SYSPOOL
SPPBATFO
100,5,xxxxxxxxx
FIN
```

### Example - Execution of SPPBATFO under VSE/ESA:

```
//JOB SPPBATFO
//OPTION LOG
//ASSGN SYSLST,00E
//EXEC PROC=ADAV61LB
//EXEC PROC=ALL41LB
//ASSGN SYS000,READER
//EXEC NATBATCH,SIZE=NATBATCH,PARM='SYSRDR'
FSPOOL=(xxx,xxx),IM=D
/*
ADARUN DA=xxx,SVC=xxx,TNAE=9999999,TT=99999
/*
```

<Untitled> Reset - Function 30.2

```
LOGON SYSPOOL
SPPBATFO
100,5,xxxxxxxx
FIN
/*
/&
```

### Example - Execution of SPPBATFO under BS2000/OSD:

```
/.FORMAT LOGON
/REMARK ********************
/REMARK *** Format Spool File with
/REMARK *** 100 Groups, 5 Records
/REMARK ********************
/SYSFILE SYSLST=LI.LST.FORMAT
/SYSFILE SYSOUT=LI.OUT.FORMAT
/SYSFILE SYSDTA=(SYSCMD)
/EXEC NAT41B
AUTO=ON, ETID=' ', IM=D
/EOF
LOGON SYSPOOL
SPPBATFO
100,5,xxxxxxxx
FIN
/SYSFILE SYSLST=(PRIMARY)
/SYSFILE SYSOUT=(PRIMARY)
/LOGOFF NOSPOOL
```

#### Note:

xxxxxxxx = current password

## **Reset - Function 30.2**

With the Reset function, the spool file is reset to its original status. All definitions concerning profiles, printers, etc. are deleted, and the spool file is newly formatted.

When you invoke this function, the Reset Spool File window appears.

This window is similar to the Format Spool File window, and the same information has to be entered (see Format Function 30.1).

#### Note:

Before this function is executed, you are prompted for confirmation (Y/N).

## **Increase - Function 30.3**

During operation, the spool file may be increased by a certain number of new groups. Existing reports are not deleted by this function. The record-to-group assignment remains the same. The execution of this function might be useful after error message NAT1556 (spool file is full).

When you invoke this function, the Increase Spool File window appears.

Copyright Software AG 2002 5

Recover Password - Function 30.4 < Untitled>

```
Date 2002-10-18
Time 09:52:49
                 *** Natural Spool Administration ***
User SAG
                                                   File 7/411
                             Menu
                               +----- Increase Spool File 7/411 -----+
     Administration
                               ! Current layout of report data area
     10 Reports/Queues
     11 Devices
                               ! Number of groups ...... 500
     12 Abstracts
     13 Applications
                              ! Number of records/group .. 3
     14 Change Spool File ! -------
                              ! New layout of report data area
     Maintenance
                              ! New number of groups .... _____
     30 Spool File Properties
     31 Objects
                              ! Number of records/Group .. 3
                              ! -----
     32 Mass Update
                              - 1
     33 Hardcopy Allocations
     34 Transfer Objects
                              ! Password .....
Modify values.
Command ===>
Enter-PF1---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Forma Reset Incre Recov Set S Modif Acces Displ Canc
```

## **Recover Password - Function 30.4**

If you have forgotten your password, you can invoke this function to reset the password to the original default password SYSPOOL.

The password is immediately reset as soon as you invoke this function.

#### Note

This function can only be executed by the user who last changed the password.

## **Set Spool Option - Function 30.5**

When you invoke this function, the Spool Option window appears.

Time 09:53:52 *** Natural	Spool Administration *** Date 2002-10-18
User SAG	Menu File 7/411
	+ Spool Options 7/411+
Administration	1 - 1
	! 1 Spool File Options !
10 Reports/Queues	! 2 Defaults and Models !
11 Devices	! 3 General Spool Server Options !
12 Abstracts	! 4 BS2000 Options !
13 Applications	! 5 CICS Options !
14 Change Spool File	! 6 IMS/DC Options !
	1 - 1
	1
Maintenance	1
	$\Gamma$ 1
30 Spool File Properties	$\Gamma$ 1
31 Objects	$\Gamma$ 1
32 Mass Update	! . Exit !
33 Hardcopy Allocations	$\Gamma$ 1
34 Transfer Objects	! Command / _ /
	++
Enter command, or press a PF-key	7.
Command ===>	
	F5PF6PF7PF8PF9PF10PF11PF12
Entr Help Menu Exit Spool De	efau Gener BS200 CICS IMS/D Canc

#### Note:

Display of the BS2000/OSD, CICS and IMS/TM options in this window (Options 4 to 6) depends on your specification in the Spool File Options window.

## **Spool File Options - Option 1**

When you select this option, the Spool File Options window appears.

Spool File Options - Option 1 <Untitled>

In this window, you can define the following settings globally for the spool file (not per user):

- The type of hardcopy allocation: T=via terminal ID, U=via user ID.
- The mask for hardcopy allocation. This allows you to specify a hardcopy allocation for a group of terminals/users. To do so, you can mask any position of the name (terminal or user, depending on the type of hardcopy allocation) with any character other than a question mark (?). When the hardcopy allocation is performed, the positions in the name you have masked are not evaluated. For example, all users on the same floor are to use the same printer and the terminal ID is used. The system administrator defines terminal IDs in which the positions 5 and 6 indicate the floor. In this case, the type of hardcopy allocation is T and the mask is ####\_ \_## (the positions 1-4 and 7-8 will be ignored). The allocation is done via a logical printer with the name "- - -01- -" for the first floor. The corresponding definitions can now be allocated to this printer.
- Whether user statistics are to be activated (Y/N). When activated, the number of reports, pages and lines is output for each user.
- Whether usage of clusters is to be activated (Y/N). See also Clusters Function 31.7.
- Whether logging for objects is to be activated (Y/N). When activated, the last 12 modifications are logged for each object. Using Function 41, you can check the log.
- Whether logging for reports is to be activated (Y/N). When activated, all report actions are logged. For reasons of performance, this function should only be activated if required.
- The sequence in which to list the reports (see also Reports/Queues Function 10):
  - J Job numbers
  - D Destination/Form, status, priority, creation date
  - U Sending user ID, Destination/Form, status, priority, creation date
  - O Best sequence to be decided by program.

To modify the default for the current session, use the line command SQ or Function 10.

• The time format in which to the display date and time fields or to be used for input.

All date and/or time specifications (for example, time windows, creation date) are stored in the spool file in CPU (store clock value) format.

The value specified controls the display of or the input in a date or time field:

- C Displays all date/time values in CPU format.
  Input values (for example, in time windows) are also considered store clock values.
- N Converts all store clock values into the Natural time format considering the settings of the Natural parameter TD, DD and/or YD.

The conversion also includes input values.

Example of TD=-2:

Input 21.01.2002 18:00 will be converted into CPU format 21.01.2002 20:00 and stored as such. Creation date of report 04.05.2002 09:30 will be displayed as 04.05.2002 07:30

- Whether the current spool file is to be used by different operating systems / TP monitors (Y/N).
- When different operating systems / TP monitors are to be used, you have to specify which ones are to be used: BS2000/OSD, CICS and/or IMS/TM (Y/N).

You have to enter a password to execute this function.

## **Defaults and Models - Option 2**

In certain environments (such as a test environment or Entire Output Management), it is not required to define different logical printers. In this case, you can define a logical printer as default printer. This default printer will always be used when no value or an invalid value is specified.

When you have many objects with the same values, it may be helpful to predefine these recurring values using models.

When you select this option, the Defaults and Models window appears.

```
+----- Defaults and Models 7/411 -----+
     Administration
     12 Abstracts .
13 Applications !
14 Change Spool File ! Mark object types !
                               ! _ User Profile
                               ! _ Logical Printer
     Maintenance
     . _ Logical Printer
! _ Allocation Table
30 Spool File Properties ! _ Printer
31 Objects ! _ NTCC Table
32 Mass Update ! _ C-1 - C-1
     33 Hardcopy Allocations
34 Transfer Objects
                              | -----
                              ! Password
Modify values, or press a PF-key.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Spool Defau Gener BS200 CICS IMS/D Canc
```

In this window, you can specify the following:

- Whether a logical printer is to be used as default (Y/N),
- The object types for which you want to define models.

You have to enter a password to execute this function.

When you specify that a logical printer is to be used as default printer, the following window appears in which you can define/modify all information on the logical printer:

Defaults and Models - Option 2 <Untitled>

```
*** Natural Spool Administration *** Date 2002-10-18
Time 12:21:16
                                                      File 7/411
User SAG
                               Menu
                                +-----DEFAULT LOG.PRINTER 7/411-----+
     Administration
                                ! Name ..... _____
      10 Reports/Queues
                                   Type ..... _____
                                 1
                                ! Destination/Form ... _____ / _
      11 Devices
12 Abstracts
                             ! Physical printer .. _____
      13 Applications
     14 Change Spool File ! Duplicates ..... 0__
                                ! Disposition ..... _
                                ! Priority ..... 0___
     Maintenance
                                ! Protection ...... N
      30 Spool File Properties !
      31 Objects
32 Mass Update
                                ! Retention period ... 0___
                                ! for Dispositions DNHNKNLN
      32 Mass opuace
33 Hardcopy Allocations
34 Transfer Objects
                               1
                                ! Calendar ..... __
Name of logical printer missing, reenter.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Spool Defau Gener BS200 CICS IMS/D Canc
```

When a default printer has already been defined, an additional Delete field appears in the window. If you specify Y, all values that have previously been defined are reset to zero or blank.

See Maintaining a Logical Printer for more information on the fields in this window.

When you define a model, for example, for user profiles, the following window appears. You can now define/modify all required information.

```
-----Model for user profile-----
                      Default
     Select existing logical printers from the spool file ..... !!
     _ ______
                                                             1 1
     No. LPF Name No. LPF Name No. LPF Name
                                                              1 1
  1

    2
    3
    4

    6
    7
    8

    10
    11
    12

    14
    15
    16

    18
    19
    20

    22
    23
    24

     1 ______
5 _____
9 _____
13 _____
17 _____
                                                4 _____
                                                              1.1
  1
  1
                                                              1 1
                                                              1 1
                                                              -1
        _____ 23 ____ 24 ____
____ 27 ____ 28 ____
___ 31 ____ HC ____
                                 23
                                                24
     21
                                                              1 - 1
     25
  1
                                                             1 1
                                                             1 1
  +----+ +
Enter a name, or mark a logical printer.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
     Help Menu Exit User Logic Alloc Print Heade Appli NTCC Canc
```

When you define models for object types, see the descriptions of the functions listed below for information on the fields in the resulting window.

Object Type	See					
User Profile	Function 31.1.					
Logical Printer	Function 31.2.					
Allocation Table	Function 31.3.					
Printer	Function 31.4.					
NTCC Table	Function 31.8.					
Calendar	Function 31.9.					

## **General Spool Server Options - Option 3**

When you select this option, the General Spool Server Options window appears.

```
*** Natural Spool Administration *** Date 2002-10-18
Time 12:25:33
                                                 File 7/411
User SAG
                           Menu
         ----- General Spool Server Options 7/411 -----
      ! Reprint Options for reports
      ! with status LOST (Y/N)
        with status RECO (Y/N)
      ! Messages to console
      ! Messages to protocol file (Y/N) Y
      ! Delete Options for reports
      ! by retention period (Y/N) N Time interval for check (Min.) 0_{--} !
        Start Option for reports
        with status WAIT (Y/N) N Time interval for check (Min.) 0___
        Password
Modify values.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Spool Defau Gener BS200 CICS IMS/D Canc
```

The options in this window apply for all platforms.

You can define the following:

- ullet Whether there will be a reprint for reports with status LOST and/or RECO (Y/N).
- Whether messages will be written to the console and/or a protocol file (Y/N).
- Whether there will be a delete by retention period (Y/N).
- The time interval in minutes between two checks when a delete by retention period is to occur.
- Whether there will be an automatic start of the spool-out for reports with status WAIT (Y/N).
- The time interval in minutes between two checks when a start of the spool-out for reports with status WAIT is to occur.

BS2000/OSD Options <Untitled>

You have to enter a password to execute this function.

### **BS2000/OSD Options**

This option is only available if usage of BS2000/OSD has been specified in the Spool File Options window.

When you select this option, the BS2000/OSD Options window appears.

```
+----- BS2000 Options 7/411 -----+
     Administration
                              ! Parameters for the Spool Server !
     10 Reports/Queues
     11 Devices
                              ! Restart option (Y/N)
     ! Time function (Y/N)
     Maintenance
     30 Spool File Properties ! Max. No. of starts 0___
31 Objects ! Min. time interval (minutes) 10__
32 Mass Update ! -------
                              - !
                           !!!
     33 Hardcopy Allocations
34 Transfer Objects
                             ! Password
Modify values.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Spool Defau Gener BS200 CICS IMS/D
```

The specifications in this window are only validated by spool servers running under BS2000/OSD.

You can define the following for the Restart option:

- Whether printers with status INOP are to be restarted (Y/N).
- The maximum number of printers that are to be restarted at the same time. The value 0 indicates an unlimited number of print jobs. The value 999 means that all printers are set to status FREE and that print jobs are not generated.
- The minimum amount of minutes between two actions.

You can define the following for the Time function:

- Whether reports are to be started (Y/N) according to the time interval specified for the corresponding allocation (see Function 31.3).
- The maximum number of starts that can be generated at the same time. The value 0 indicates an unlimited number of print jobs.
- The minimum amount of minutes between two actions.

You have to enter a password to execute this function.

<Untitled>

## **CICS Options**

This option is only available if usage of CICS has been specified in the Spool File Options window.

When you select this option, the CICS Options window appears.

```
*** Natural Spool Administration *** Date 2002-10-18
Time 12:40:01
User SAG
                  NAF Parameter for CICS environment
                                                   File 7/411
Values taken from NAF parameter module
CICS Transaction ID NA41
                        CICS System ID -- Terminate task (Y/N) -
Values taken from Spool File if not defined in NAF parameter module
CICS Transaction ID ____ CICS System ID __
                                        Terminate task (Y/N)
INIT function (Y/N) \hdots _
                                CICS System ID for INIT function
                             INIT messages to log file (Y/N) . \_
INIT messages to console (Y/N) _
Password
Modify values.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
     Help Menu Exit
```

The specifications in this window are only validated by spool servers running under CICS.

You can define the following parameters:

- The CICS Transaction ID of the Natural session used for the spool server.
- The CICS System ID of the Natural session used for the spool server (optional).
- Whether a new CICS task is to be invoked for each report (Y) or whether all reports of a queue are to be printed by the same CICS task (N).
- Whether a scan of the spool file is to occur at Natural initialization (Y/N) and the corresponding CICS SYSTEM ID.
- Whether messages of the Init function are to be written to the console and/or log file (Y/N).

The parameter values described above will only be considered if no NAF parameter module has been defined or if the corresponding values have not been defined in a NAF parameter module.

If no NAF parameter module exists, the following output is generated:

IMS/TM Options <Untitled>

```
Time 12:33:22 *** Natural Spool Administration *** Date 2002-10-18
User SAG NAF Parameter for CICS environment File 7/411

NAF parameter module not linked or not available

Values taken from spool file if not defined in NAF parameter module

CICS Transaction ID ____ CICS System ID ____ Terminate task (Y/N) _

INIT function (Y/N) ..... _ CICS System ID for INIT function ____
INIT messages to console (Y/N) _ INIT messages to log file (Y/N) . _

Password
Modify values.
Command ===>
Enter-PF1--PF2--PF3--PF4--PF5--PF6--PF7--PF8--PF9--PF10--PF11--PF12---
Help Menu Exit Canc
```

You have to enter a password to execute this function.

## **IMS/TM Options**

14

This option is only available if usage of IMS/TM has been specified in the Spool File Options window.

When you select this option, the IMS/TM Options window appears.

```
User SAG
                            Menu
                                                 File 7/411
                             +----+ IMS/DC Options 7/411 -----+
                             ! Values from NAF parameter module
    Administration
    10 Reports/Queues
                            ! BMP Transaction ID . . . . - !
! BMP JCL Member . . . . . . . !
! Wait for input (Y/N) . . . . . !
! ------!
    11 Devices
    12 Abstracts
    13 Applications
14 Change Spool File
    13 Applications
                            ! Values used if NAF parameter module !
    Maintenance
                            ! is not linked
    ! BMP JCL Member ..... _____!
                            ! Wait for input (Y/N) .... _
                                                              1
    32 Mass Update
                            ! -----
    33 Hardcopy Allocations
    34 Transfer Objects
                            ! Password
Modify values.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
```

The specifications in this window are only validated by spool servers running under IMS/TM.

You can define the following parameters:

- The BMP ID and JCL Member,
- Whether the BMP is to wait for input (Y/N).

The parameter values described above will only be considered if no NAF parameter module has been defined or if the corresponding values have not been defined in a NAF parameter module.

If no NAF parameter module exists, the following output is generated:

```
Time 12:50:49
              *** Natural Spool Administration ***
                                          Date 2002-10-18
User SAG
                        Menu
                                          File 7/411
                         +---- IMS/DC Options 7/411 ----
    Administration
                         1
                                NAF parameter module
    10 Reports/Queues
                        . .
    11 Devices
                             not linked or not available
    12 Abstracts
    13 Applications
    14 Change Spool File
                         ! Values used if NAF parameter module
    Maintenance
                         ! is not linked
    32 Mass Update
                        ! Wait for input (Y/N) ...._
    Modify values.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Entr Help Menu Exit Spool Defau Gener BS200 CICS IMS/D
```

You have to enter a password to execute this function.

## **Modify Password - Function 30.6**

When you invoke this function, you can modify your password.

```
Time 12:53:09
                   *** Natural Spool Administration *** Date 2002-10-18
                                                        File 7/411
User SAG
                                Menu
      Administration
                                            Information
      10 Reports/Queues
                                            20 Cross-Reference
      11 Devices
                                            21 Statistics
      12 Abstracts
                                            22 Look at Spool File
                                            23 CALLNAT Handling
      13 Applications
      14 Change Spool File
                                  +---- Spool File 7/411: Password ----+
      Maintenance
                                 ! Current password .....
      30 Spool File Properties
      31 Objects
                                 ! New password .....
      32 Mass Update
      33 Hardcopy Allocations
                                          43 Delete Reports by Date
      34 Transfer Objects
 Enter password.
 Command ===>
 Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
          Menu Exit Forma Reset Incre Recov Set S Modif Acces Displ Canc
```

In the resulting window, enter your current password and the new password. Press ENTER and confirm the new password by entering it once more.

## **Access Authorization - Function 30.7**

When you invoke this function, you are first prompted for a password.

If the password is correct, the Access Authorization window appears in which you enter a user ID, or an asterisk (\*) to select the user ID from a list.

When access authorizations have not yet been defined for the specified user, you can now add them for this user.

When access authorizations have already been defined for the specified user, you can now modify them. An additional Delete field is provided, in case you want to delete all access authorizations for this user.

	Ме	n u · Access Aı	ıtho		File				
Administration	! Add			KOL					
114	1								
10 Reports/Queues	1			_ 					
11 Devices	1		qO		. Owner		Priv.		
12 Abstracts	1								
13 Applications	1	Spool File	N	I		I		I	
14 Change Spool File	1	User Profile		I	N	I		I	
	1	Logical Printer		I	N	I		I	
	1	Allocation		I	N	I		I	
Maintenance	1	Printer		I	N	I	N	I	
	1	Header Page		I	N	I		I	
30 Spool File Properties	1	Application		I	N	I	N	I	
31 Objects	1	Cluster		I	N	I		I	
32 Mass Update	1	NTCC Table		I	N	I		I	
33 Hardcopy Allocations	1	Calendar		I	N	I		I	
	1	Message Header		I	N	I		I	
34 Transfer Objects	•	_							

There are three types of authorization:

### • Operator

A user can be defined as spool file operator. However, the defined user is only allowed to use Functions 10 (Reports/Queues) and 11 (Devices).

### Owner

A user can be defined as an owner of an object. An owner is allowed to modify or delete an object.

### • Private

Usage of some objects (printers and application) can be restricted to specific users.

You can specify the following in the access authorization window:

Code	Description			
Y	Can only be specified for the spool file to define the user as operator. In all other cases, Y indicates that access authorization was granted using S.			
N	The user has no access authorization.			
*	Access authorization is granted for all objects of this type. This code cannot be specified for the spool file.			
S	Access authorization is granted for selected objects of this type. In the resulting window, you specify Y next to each desired object. This code cannot be specified for the spool file.			

## **Display Last Modification - Function 30.8**

When you invoke this function, the Last Modification window appears.

```
File 7/411
User SAG
                         Menu
+------ Spool File 7/411: Last Modifications ------+
1
                                                         1
1
  Date / Time 2002-10-18 12:33:17 CPU time
                                                         1
             2002-10-18 12:33:17 Natural time
1
                                                         1
1
1
  User ID SAG
.
1
  Last executed function: Set/modify the spool file options.
1
   ______
  Date / Time 2002-10-18 12:55:31 CPU time
            2002-10-18 12:55:31 Natural time
1
1
  User ID SAG
1
1
   Last executed function: Password modified
Press ENTER to continue.
Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
        Menu Exit Forma Reset Incre Recov Set S Modif Acces Displ Canc
```

This window provides information on the last modification of the spool file properties and the last modification of the password. The date and time are displayed in internal CPU format (store clock value) and, additionally, in the equivalent Natural time format as defined with the parameters TD, DD and/or YD.